


FLUSH
KEYED LOCK ON
LOCKING MODELS



| MODEL | FINISH | LOCKING |
|-------|----------------|---------|
| 6423 | POLISHED BRASS | NO |
| 6426 | CHROME | NO |
| 6429 | POLISHED BRASS | YES |
| 6428 | CHROME | YES |

| | | |
|-----|-----|----------|
| C | WDC | 06-22-20 |
| REV | BY | DATE |

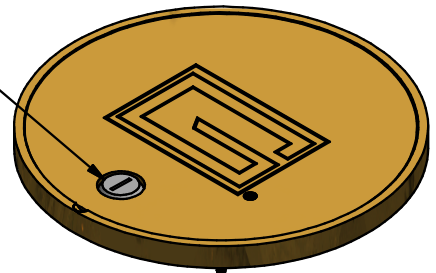

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

6" BRASS FLOOR COVER

| | | | | |
|----------|--------|------|-----------|-------------|
| DRAWN | CROSBY | DATE | 6/22/2020 | DATE ISSUED |
| APPROVED | | DATE | | |

FILE LOC. Q:\Inventor Files\Specification Files\11_Volleyball

| | | | | |
|------|-------|----------|----------|-----|
| SIZE | SCALE | SHT. NO. | PART NO. | REV |
| A | | 1 OF 2 | 6423 | C |



MODEL 6423

6" BRASS FLOOR COVER

Protect players on the court by installing cover plates over in-ground sleeve inserts.

Floor cover shall be brass alloy with attached hinged cover. Hinge and four holes in the ring (for screwing into the floor) shall be completely concealed under the cover when in the closed position, allowing for a completely flat surface. In a "floating" wood floor, the floor plate is connected to the floor only, allowing it to move with the expansion and contraction of the floor. Cover shall be 6-1/4" in diameter by 1/2" thick. Diameter of opening shall be 5".

Flush keyed lock supplied on locking models.

6423 - Polished Brass without lock

6426 - Chrome without lock

6429 - Polished Brass with lock

6428 - Chrome with lock