


Dimensions "A" & "D" are shown for maximum elevation of the truss range and may vary to fit the exact attachment elevation and building structure.

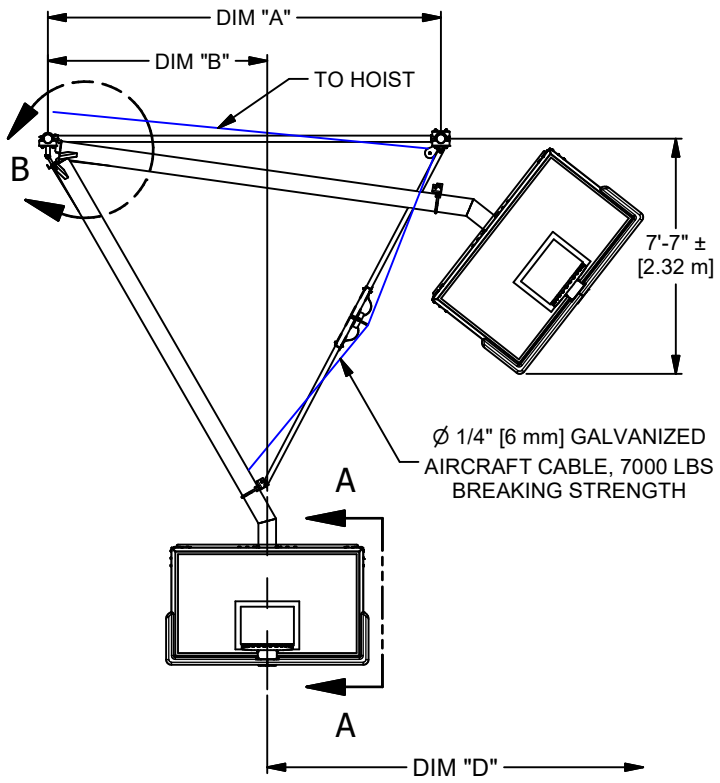

PN	TRUSS HEIGHT	DIM "A"	DIM "B"	DIM "C"	DIM "D"
3209-20	20' to 20.99' [6.10-6.39M]	6'-6" [1.98M]	3'-11" (1.20M)	6'-9" [2.06M]	9'-0" [2.74M]
3209-21	21' to 21.99' [6.40-6.70M]	7'-8" [2.33M]	4'-6" (1.38M)	6'-9" [2.06M]	9'-7" [2.92M]
3209-22	22' to 22.99' [6.71-7.0M]	8'-9" [2.68M]	5'-1" (1.55M)	6'-9" [2.06M]	10'-2" [3.11M]
3209-23	23' to 23.99' [7.01-7.31M]	9'-11" [3.03M]	5'-8" (1.73M)	6'-9" [2.06M]	10'-9" [3.29M]
3209-24	24' to 24.99' [7.32-7.61M]	11'-1" [3.38M]	6'-3" (1.91M)	6'-9" [2.06M]	11'-5" [3.47M]
3209-25	25' to 25.99' [7.62-7.92M]	12'-3" [3.73M]	6'-10" (2.08M)	7'-10" [2.39M]	12'-0" [3.65M]
3209-26	26' to 26.99' [7.93-8.22M]	13'-5" [4.09M]	7'-5" (2.26M)	7'-10" [2.39M]	12'-7" [3.83M]
3209-27	27' to 27.99' [8.23-8.52M]	14'-7" [4.44M]	8'-0" (2.44M)	7'-10" [2.39M]	13'-2" [4.01M]
3209-28	28' to 28.99' [8.53-8.83M]	15'-9" [4.79M]	8'-7" (2.61M)	7'-10" [2.39M]	13'-9" [4.18M]
3209-29	29' to 29.99' [8.84-9.13M]	16'-11" [5.14M]	9'-1" (2.78M)	7'-10" [2.39M]	14'-4" [4.37M]
3209-30	30' to 30.99' [9.14-9.44M]	18'-0" [5.50M]	9'-9" (2.96M)	7'-10" [2.39M]	14'-11" [4.54M]
3209-31	31' to 31.99' [9.45-9.74M]	19'-2" [5.85M]	10'-4" (3.14M)	7'-10" [2.39M]	15'-6" [4.71M]

H	ERD	07/28/23
G	WDC	10-14-22
F	JJC	08-05-19
E	WDC	07/02/13
REV	BY	DATE

GARED PERFORMANCE SPORTS SYSTEMS

Gared Performance Sports Systems
9200 East 146th Street, Suite A
Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED PERFORMANCE SPORTS SYSTEMS IS STRICTLY PROHIBITED.

WELDED SIDE BRACED SIDE FOLDING, BENT MAST

DRAWN CONNERLEY	DATE 4/30/2003	DATE ISSUED 4/30/2003
APPROVED	DATE	
SIZE A	SCALE	SHT. NO. 1 OF 2
PART NO. 3209	REV H	



PERFORMANCE SPORTS SYSTEMS

MODEL 3209

WELDED BENT SINGLE POST, SIDE BRACED SIDE FOLDING, BASKETBALL STRUCTURE

Recommended Application

This unit is designed for applications not allowing sufficient space behind the backboard for a rear brace or where clearance restrictions exist above the court. This single post unit can be used at heights from 20' to 32'.

Overhead Structure

Unit shall be supported from 3-1/2" O.D. x 0.120" wall A-500 Grade B horizontal and 2-3/8" O.D. x 14 gauge (0.083") wall A-500 Grade B vertical structural steel tubing secured to the building with heavy gauge steel stampings or weldments (as required by building conditions). When truss span widths exceed 10'-0", 3-1/2" O.D. x Schedule 40 (0.216") wall ASTM A-500 Grade B may be used for the horizontals. Spans over 14'-0" may use welded bridge pipe.

Backstop

The backstop shall be of a single post design with a main vertical mast made of 6-5/8" O.D. x 0.120" wall ASTM A-513 structural steel tubing with 2-1/2" x 1-1/2" x 14 gauge (0.083") wall ASTM A-513 rectangular steel tube sway braces miter cut and welded in place to a top horizontal 4" x 1-1/2" x 0.18" web ASTM A-36 steel channel. Main mast will be suspended from superstructure with an offset hanger 3" in front of the pivot point. Units with less than 3" offset will not be approved as equal. Backstop shall be manufactured to allow 3" vertical adjustment for plumbing of the backboard. All fittings shall be heavy gauge steel stampings or weldments. A direct goal attachment is used to transfer stress from the goal to the main mast assembly preventing strain on the backboard.

Side brace shall be 1-7/8" O.D. x 14 gauge (0.083") wall ASTM A-513 steel tubing attached to the main mast 12" to 18" above the bend in the mast pipe. When brace lengths are greater than 15'-0", side brace shall be 2-3/8" O.D. x 14 gauge (0.083") wall ASTM A-500 Grade B steel tubing. Folding brace shall be of a jackknife design with an adjustable hinge for easy installation and field adjustment. Backstop shall be raised and lowered with 1/4" galvanized aircraft cable with a breaking strength of 7000 lbs. Backstop manufactured in accordance with 1994 rule 1, section 8, stating that all parts of the backboard support system shall be at least 6" behind backboard.

All steel has a black powder coat finish, standard. Optional colors available.

Accessories

Backboards and Goals - See the backboards and goals section in the specification manual.

Backboard Padding - See the accessories section in the specification manual.

Hoists - Electric hoist or manual winch is available on all folding units. See the accessories section in the specification manual.

Safstop Safety Locking Strap - See the accessories section in the specification manual.

Certifications

Unit meets all requirements of the NCAA and NFHS. Unit complies with design standards of the California Department of State Architects.

Subject to design change and current manufacturing practices.