


CURVE AND STACK DETAIL (OPTIONAL)

DETAIL C

JOIST ATTACHMENT DETAIL

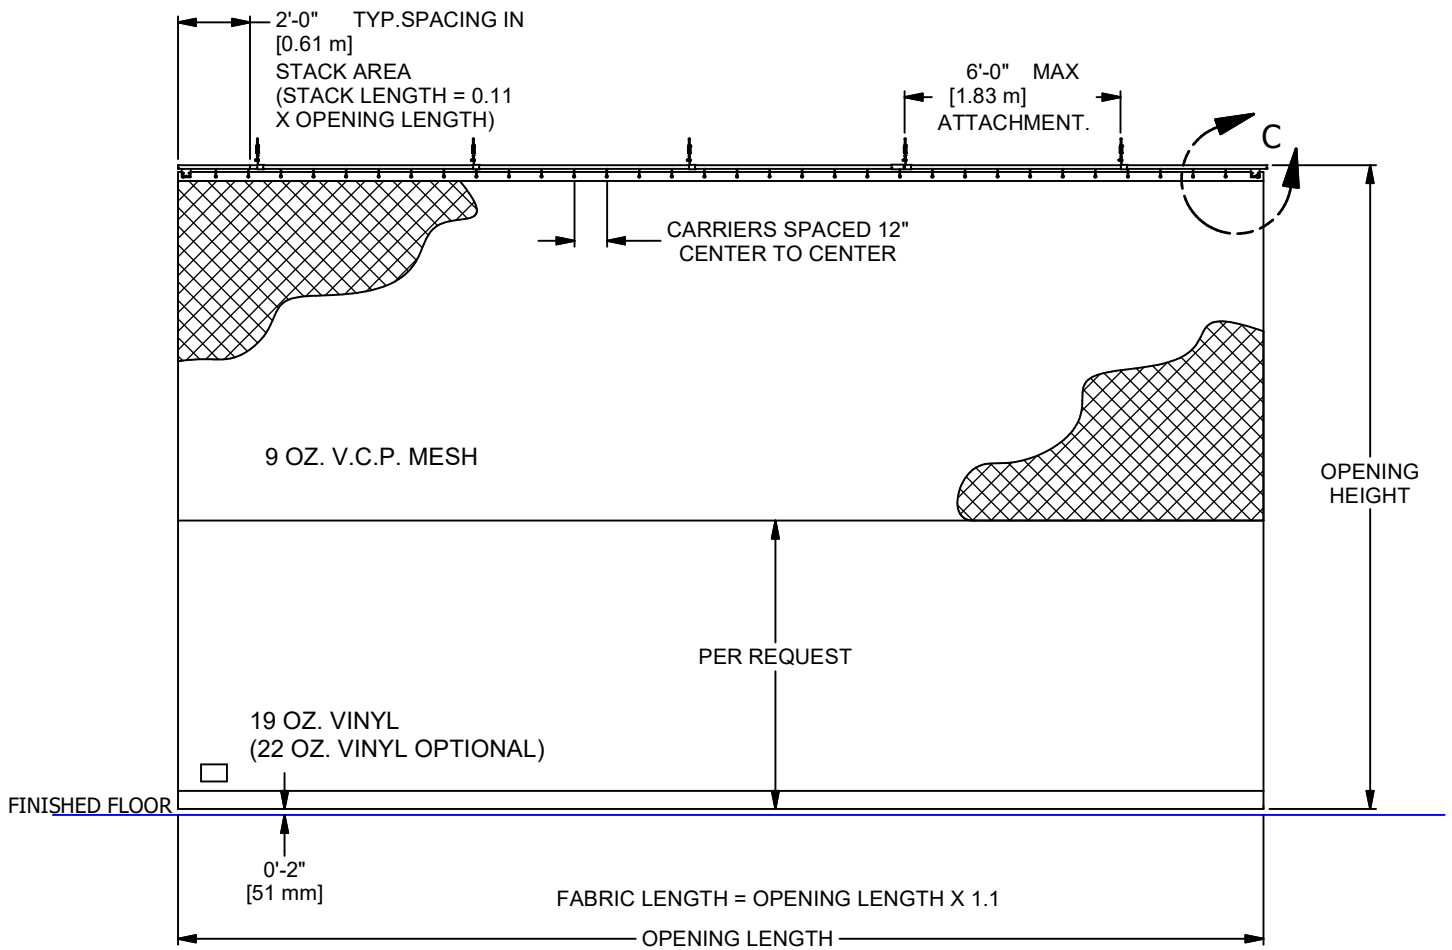

NOTE: 22 OZ. VINYL ONLY AVAILABLE IN RED, ROYAL BLUE, OR GRAY

H	ERD	08-17-23
G	MJP	01/09/23
F	WDC	08/16/22
E	JJC	11/21/19
D	JJC	11/29/11
C	DAM	07/21/09
B	RWP	05/21/09
A	MJB	12/17/03
REV	BY	DATE



Gared Performance Sports Systems
 9200 East 146th Street, Suite A
 Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED PERFORMANCE SPORTS SYSTEMS IS STRICTLY PROHIBITED.

WALK DRAW CURTAIN

DRAWN CONNERLEY		DATE 4/22/2003	DATE ISSUED	
APPROVED		DATE		
SIZE A	SCALE NONE	SHT. NO. 1 OF 2	PART NO. 4013	REV H



**PERFORMANCE
SPORTS SYSTEMS**

MODEL 4013

WALK-DRAW DIVIDER CURTAIN

MATERIAL

The lower section, height to be specified at time of order, shall be solid 19 oz. or 22 oz. polyester reinforced, fire retardant (meeting ASTM E-84 Class A rating with 25 Flame Spread and 450 Smoke Development as well as NFPA-701) and mildew resistant vinyl fabric. All seams shall be electronically welded with a full contact weld that fuses the material together for superior strength. A pocket shall be formed along the bottom edge to accommodate a 4/0 coil proof chain for ballast. The upper section shall be a 9 oz. vinyl coated polyester mesh. The top hem shall be a double thickness of mesh reinforced with a vinyl strip. Grommets shall be attached along the vinyl strip and located 12" on center for attachment to carrier assemblies. Curtain shall stop 2" above the finish floor and can be specified, either all mesh, all vinyl or any combination in between. The curtain fabric shall be 10% longer than the curtain opening.

STRUCTURE

The track shall be an enclosed galvanized steel channel 1-7/16" wide and 1-1/4" high. Track suspension spacing shall not exceed 6'0" center to center in the run of the curtain and 2'0" in the storage area. Curtain may either be stacked against the wall or with the addition of an optional curved section of track, the curtain may be stored along the wall for even more clearance. The storage length shall be minimum of 11% of curtain opening length. Intermediate carrier assemblies shall have two 1" diameter nylon wheels spaced on 12" centers. A (4) wheel trolley, constructed with 1" steel wheels and ball bearings, shall be used as the carrier on each end. A 1/4" polyester tow rope to operate the curtain shall be supplied.

ACCESSORIES

TIE BACK STRAP

Optional curtain tie back strap is model 4019. See curtain divider section of the specification manual.

Subject to design change and current manufacturing practices.