
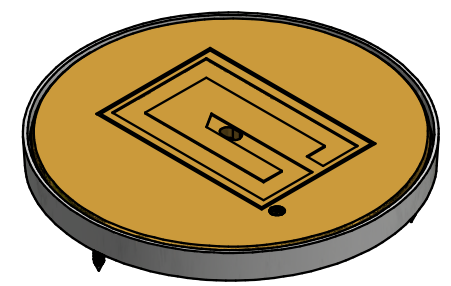


SECTION A-A

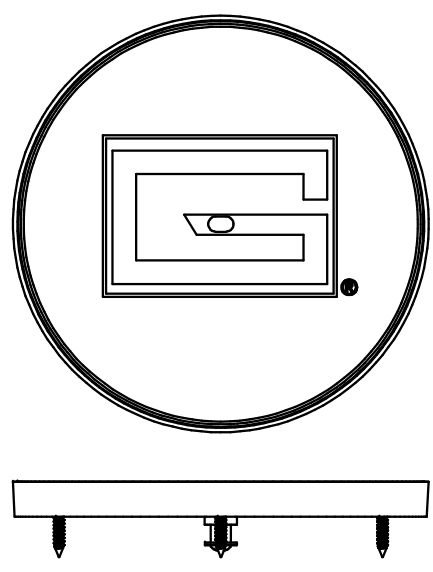

6430

MODEL	FINISH
6430	POLISHED BRASS
6431	CHROME

C	WDC	06-22-20
REV	BY	DATE

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

6" SWIVEL FLOOR COVER, BRASS FINISH

DRAWN	CROSBY	DATE	6/22/2020	DATE ISSUED
APPROVED		DATE		

FILE LOC. Q:\Inventor Files\Specification Files\11_Volleyball

SIZE	SCALE	SHT. NO.	PART NO.	REV
A		1 OF 2	6430	C



MODEL 6430 / 6431
6" SWIVEL FLOOR COVER

Protect players on the court by installing cover plates over in-ground sleeve inserts.

Floor cover shall be brass plated steel for model 6430 and chrome plated steel for model 6431. Cover plate shall have a molded plastic recessed mounting flange, cork gasket, and 6 3/16" diameter cover. Molded plastic recessed mounting flange shall be 6 1/2" in diameter and have 3 holes in the ring (for screwing into the floor) that shall be completely concealed under the cover when in the closed position, allowing for a completely flat surface. In a "floating" wood floor, the floor plate is connected to the floor only, allowing it to move with the expansion and contraction of the floor. Cover shall be 6-3/16" in diameter by 1/4" thick. Diameter of opening shall be 5 5/16".

To open, the floor cover shall lift and swivel, staying parallel to the floor. A lifting key shall be provided with cover.

6430 - Polished Brass Finish

6431 – Chrome Finish