



	Package	Туре	Board	Goal	Brace	
	PK3505	Front	1701	39W O	None	
	PK3510	Front	1750	39W O	None	
	PK3515	Rear	1266	66T	None	
	PK3530	Front	BB48A38	726	Yes	
][PK3535	Front	1750B	39W O	Yes	
	PK3540	Front	1245T	39W O	Yes	
	PK3545	Rear	1266	66T	Yes	
	GNA35	Front	None	None	None	
	GNA35R	Rear	None	None	None	
	GN35	Front	None	None	Yes*	
	GN35R	Rear	None	None	Yes*	
	-					

* Braces are for "fan style" mounts only.



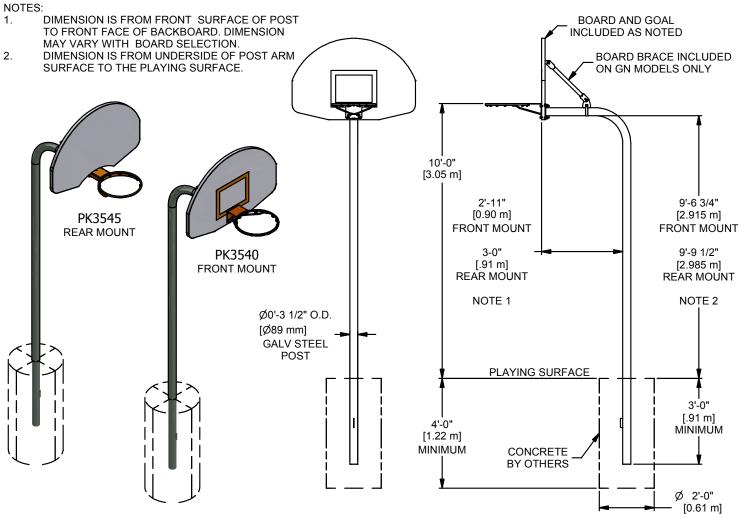



Gared Holdings, LLC 9200 E. 146th St. Noblesville, IN 46060 THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYRIG OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

GOOSENECK SYSTEM, 3 1/2", 3 FT EXT.

MINIMUM

- 1										
l	DRAWN	VN CROSBY		DATE 9/12/2017		DATE ISSUED				
l	APPROVED CROSBY		DATE							
l	FILE LOC. Q:\Inventor Files\Specification Files\06_Outdoor Products									
1	SIZE	SCALE	SHT. N	0.	PART NO.		REV			
ı	ΙA	NONE	1 OF	2	(SN35	В			





MODEL GN35 & GN35R

GOOSENECK OUTDOOR BASKETBALL SYSTEM W/ BRACES

GN35 / GN35R

This unit uses a gooseneck design to extend the backboard 36" out from the post. The post shall be $3\ 1/2$ " O.D. x 0.160" wall galvanized tube. The mounting plate is used as a direct goal attachment for the backboard. Two braces extending from the upper mounting points of the backboard to the gooseneck extension provide added rigidity to the system. The GN35 system can be used with all outdoor front mount and the GN35R system with rear mount boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

MODEL GNA35 & GNA35R

GOOSENECK OUTDOOR BASKETBALL SYSTEM

GNA35 / GNA35R

This unit uses a gooseneck design to extend the backboard 36" out from the post. The post shall be 3 1/2" O.D. x 0.160" wall galvanized tube. The mounting plate is used as a direct goal attachment for the backboard. The GNA35 system can be used with all outdoor front mount and the GNA35R system with rear mount boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

NOTE:

If board is greater than 36" wide, use the GN35 or GN35R model with board braces.

ACCESSORIES

PP4WR Wrap-Around Pole Pad

Subject to design change and current manufacturing practices. Revised Sept. 11, 2017 ©2008 Gared Holdings, LLC