



FURRING STRIPS
OPTIONAL



0.38
[10 mm]

OUTSIDE CORNER DETAIL




INSIDE CORNER
LAP DETAIL

4.25
[108 mm]

NOTE:
ALL CUSTOM CUTTING AND
FITTING OF PANELS IS TO
BE DONE IN THE FIELD TO
INSURE A PRECISE FIT.

14 OZ. MIN. POLYESTER LAMINATED
VINYL, ATTACHED TO BACKING WITH
STAPLES EVERY 2.00" [50.8 mm]
MANUFACTURED BY BRUIN PLASTICS OR EQUIV.
(MEETS ASTM E84, CLASS A RATED)

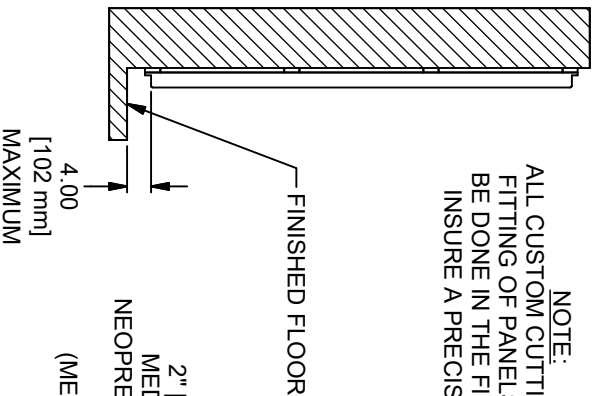


FINISHED FLOOR

4.00
[102 mm]
MAXIMUM

2" [50.8 mm] THICK CR SAFE GUARD
MEDIUM DENSITY FIRE RETARDANT
NEOPRENE FOAM. MANUFACTURED BY:
CHESTNUT RIDGE FOAM, INC.
(MEETS ASTM E84, CLASS A RATED)

7/16" [11.11 mm] OSB
BACKING BOARD

2.50
[64 mm]

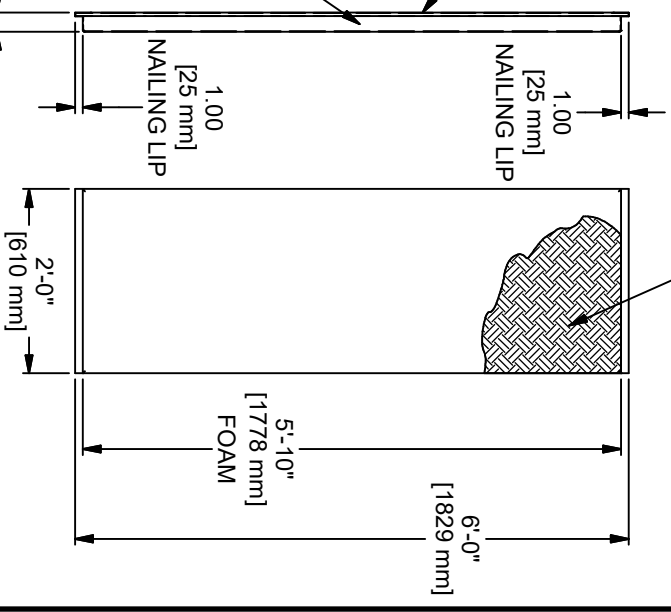

6'-0"
[1829 mm]

5'-10"
[1778 mm]
FOAM

2'-0"
[610 mm]

1.00
[25 mm]
NAILING LIP

1.00

[25 mm]
NAILING LIP



WARNING
DO NOT INSTALL PADS MORE THAN 4" ABOVE
THE FINISHED FLOOR. INSTALLING PADS
ABOVE 4" CAN RESULT IN BODY CONTACT
WITH THE WALL AND PERSONAL INJURY.



Gared Holdings, LLC
9200 E. 146th St.
Noblesville, IN 46060

FIRE RETARDANT WALL PAD

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

DRAWN: CONNERLEY DATE: 4/17/2013 DATE ISSUED:

APPROVED: DATE:

FILE LOC.: Q:\Inventor Files\

SIZE: SCALE: SHT. NO.: PART NO.: 4130

B	MJP	11/03/21
A	JJC	11/20/17
REV	BY	DATE

REV B



MODEL 4130

CLASS "A" FIRE RETARDANT WALL PADDING

Wall padding standard size shall be 6' x 2' with 1" nailing margin on top and bottom of each panel. Nailing margin reduces foam height from 6' [1.8 m] to 5'-10" [1.77 m]. Pads shall be constructed using 2" thick CR SafGuard medium fire retardant neoprene foam, as manufactured and patented by Chestnut Ridge Foam, Inc. or equal, and meeting ASTM E84 with a Class A rating meeting Flame-Spread Index of 25 or less, and Smoke Development index of 450 or less. Foam shall be cemented to 7/16" oriented strand board.

Cover material shall be 14-ounce polyester laminated vinyl as manufactured by Value Vinyls or equal, attached to backing with staples every two inches. Vinyl to be flame retardant material meeting ASTM E84, with a Class A rating.

Pad assembly shall meet ASTM E84 with a Class A rating

Vinyl shall be available in white, yellow, orange, red, kelly green, forest green, royal blue, marine blue, navy blue, gray, black, maroon, beige, teal and purple.

See model number code chart for specific model number. Custom padding (thickness, material, and color) and size of padding (height and width) must have written description.

Custom cutting and fitting of padding may be done in field to insure proper fit. Furring strips by others.

ACCESSORIES

WALL ATTACHMENT TRIMS AND HARDWARE

Most wall padding may be attached with special attachment trims and hardware. See the wall padding section in the specification manual.

CERTIFICATIONS:

ASTM E84 Class A Fire Rating
NFPA 286

Subject to design change and current manufacturing practices.