

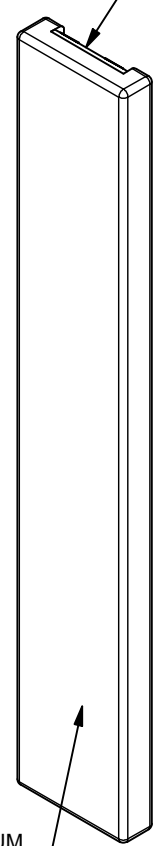


7/16" [12mm] OSB
BACKER BOARD

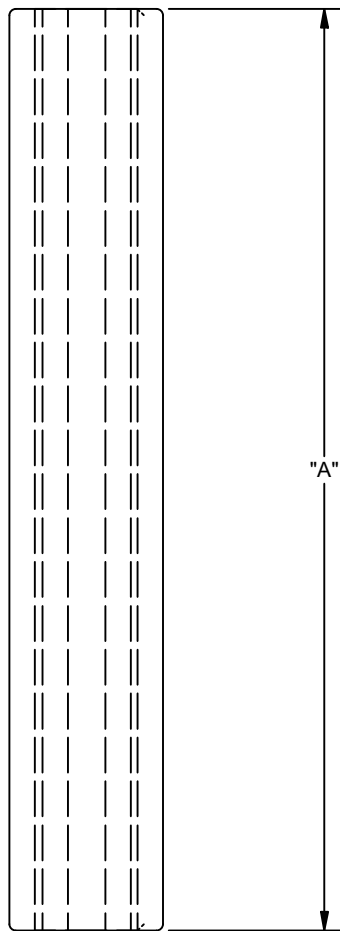

14 OUNCE MINIMUM
REINFORCED POLYESTER
LAMINATED VINYL

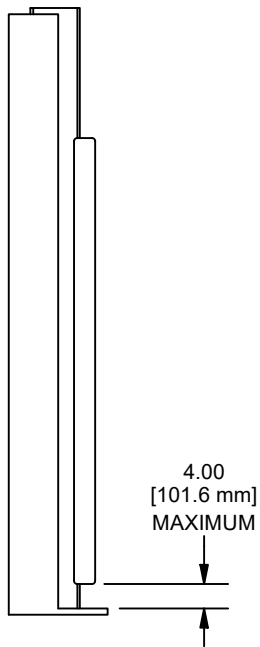

Part number	"A" Dim	"B" Dim
4206-STD	5'-10" [1778mm]	6" [152mm]
4206-NSD	6'-10" [2082 mm]	6" [152mm]
4206-NSD	7'-10" [2388 mm]	6" [152mm]
4208-STD	5'-10" [1778mm]	8" [203mm]
4208-NSD	6'-10" [2082 mm]	8" [203mm]
4208-NSD	7'-10" [2388 mm]	8" [203mm]
4210-STD	5'-10" [1778mm]	10" [254mm]
4210-NSD	6'-10" [2082 mm]	10" [254mm]
4210-NSD	7'-10" [2388 mm]	10" [254mm]
4212-STD	5'-10" [1778mm]	12" [305mm]
4212-NSD	6'-10" [2082 mm]	12" [305mm]
4212-NSD	7'-10" [2388 mm]	12" [305mm]

WARNING
DO NOT INSTALL PADS MORE THAN 4" ABOVE THE FINISHED FLOOR. INSTALLING PADS ABOVE 4" CAN RESULT IN BODY CONTACT WITH THE WALL AND PERSONAL INJURY.



Gared Performance Sports Systems
9200 East 146th Street, Suite A
Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED PERFORMANCE SPORTS SYSTEMS IS STRICTLY PROHIBITED.

WALL PAD, I BEAM

DRAWN MJP		DATE 2/7/2022	DATE ISSUED	
APPROVED		DATE		
SIZE A	SCALE NONE	SHT. NO. 1 OF 2	PART NO. 4210	REV B

B	CYC	09/26/23
A	MJP	01/28/22
-	JJC	4/23/13
REV	BY	DATE



MODEL 42XX

I-BEAM PADDING

I-Beam padding standard sizes (Part number 42XX-STD) shall be 5'-10" [1778 mm] x (I-Beam Flange Width) with a return of 1" [25.4mm] on each side with height options (Part number 42XX-NSD) available for both 6'-10" 2082 mm] x (I-Beam Flange Width) with a return of 1" [25.4mm] on each side and 7'-10" [2388 mm] x x (I-Beam Flange Width) with a return of 1" [25.4mm] on each side. Pads shall be constructed using 2" [50.8 mm] thick 3.5 lbs. density bonded polyurethane foam cemented to 7/16" [11.11 mm] oriented strand board.

Cover material shall be 14-ounce polyester laminated vinyl stapled to backing every two inches. Vinyl to be flame retardant material, which meets NFPA 701, ASTM E84, and CSFM (California State Fire Marshall). Flame retardant Vonar® interliner and fire retardant treated plywood backing are also available. Vinyl shall be available in white, yellow, orange, red, kelly green, forest green, royal blue, marine blue, navy blue, gray, black, burgundy, beige, and purple.

Custom cutting and fitting of padding may be done in field to ensure proper fit. Furring strips by others (highly recommended).

ACCESSORIES

WALL ATTACHMENT TRIMS AND HARDWARE

Adhesive and hook and fastener for attachment to I beam will be supplied with pad.

Model Number Code Chart	
4206-STD	Fits I-Beam with 6" wide flange 5'-10" tall
4206-NSD	Fits I-Beam with 6" wide flange 6'-10" tall
4206-NSD	Fits I-Beam with 6" wide flange 7'-10" tall
4208-STD	Fits I-Beam with 8" wide flange 5'-10" tall
4208-NSD	Fits I-Beam with 8" wide flange 6'-10" tall
4208-NSD	Fits I-Beam with 8" wide flange 7'-10" tall
4210-STD	Fits I-Beam with 10" wide flange 5'-10" tall
4210-NSD	Fits I-Beam with 10" wide flange 6'-10" tall
4210-NSD	Fits I-Beam with 10" wide flange 7'-10" tall
4212-STD	Fits I-Beam with 12" wide flange 5'-10" tall
4212-NSD	Fits I-Beam with 12" wide flange 6'-10" tall
4212-NSD	Fits I-Beam with 12" wide flange 7'-10" tall

Subject to design change and current manufacturing practices.